

# Diesel Generator Set

## K38 Series



808 kWe, 1010 kVA Prime



### Reliable and Durable

Cummins® 'K38 series' diesel engine with strong regrindable crankshaft, high strength connecting rod, low pressure fuel lines, STC (Step Timing Controls) injectors and high volume coolant system make 'K38 series' generating sets, more reliable and durable. Engines have clocked millions of hours, operating in some of the world's most demanding conditions. Current engines are regularly upgraded with new technologies for better performance and economy. The ultimate proof of superior performance and reliability is the fact that Cummins® entities worldwide source these engines from Cummins India for their markets.

### Unmatched Warranty

Cummins® 'K38 series' diesel engine generator sets are a truly cost effective diesel solution to long term power need backed by industry best, 2 years / 5000 hrs warranty, for the entire generating set. With superior experience in technology, design capability and commitment reliability and quality we offer an unmatched 5 years or 5000 hours (including above 2 years) warranty coverage on 5 critical components (5C) of the engine – Cylinder Head, Camshaft, Crankshaft, Cylinder Block, Connecting Rod against manufacturing defect.

### Cummins® Advantage

Special features of Cummins® 'K38 series' engines like STC (Step Timing Controls) injectors, low temperature aftercooler, square combustion chamber, optimised turbocharging and precision heavy duty camshaft make these engines the ultimate in exceptional fuel efficiency all across the operating range.

### Single Source Power Assurance

Design, manufacture and testing of engine, alternator and other accessories is done by Cummins Group of companies for optimum performance and is backed by a countrywide product support network with a single source responsibility for the entire package.

### Standard Scope

**Engine:** Cummins 'K38 series' direct injection, water cooled engine, 12 cylinder, 4 stroke, rated at 1500 RPM. It has the following specifications:

- Cummins PT fuel pump
- Cummins STC injectors
- Cummins turbocharger, Pulse tuned exhaust manifold, Stainless steel exhaust flexible connections
- Radiator or Heat exchanger, Coolant inhibitor,
- Plate type lube oil cooler
- Outboard aftercoolers
- Full flow paper element filters - fuel, lube oil and bypass
- Dry type replaceable paper element air cleaner with restriction indicator
- Flywheel housing & flywheel to suit single / double bearing alternator
- Flexible coupling for double bearing alternator
- Starting motor – Electric, Battery charging alternator
- Electronic control panel
- Cummins PowerCommand® microprocessor based genset controller
- First fill lube oil

### Alternator:

- Stamford brushless AC alternator
- Separately excited, self-regulated
- Class 'H' insulation
- Salient pole revolving field
- Single / double bearing
- Automatic voltage regulator
- PMG standard

### Accessories:

- Silencer suitably optimized to reduce noise
- Sturdy base rail
- 990 ltrs. free standing fuel tank
- Suitable batteries with connecting leads and terminals

### PS0601 Features

Cummins® PowerStart™ PS0601 control is a microprocessor based generator set monitoring, metering and control system with LCD display designed to meet the demands of today's engine driven generator sets



- AMF Functionality
- Electronic Governing
- Sync Compatible (Capable to accept external speed and Voltage bias signal from 3rd party sync controller)
- Intuitive operator interface which includes LED backlit 128X64 pixel graphic display with tactile feel soft- switches & generator set status LED lamps.
- Remote start-stop
- Engine Metering: Oil pressure, Engine temperature, battery voltage, Engine running hours
- AC Alternator Metering: L-L Voltage and L-N Voltage,
- Current (phase and total), kVA (phase and total), Frequency, kWh, kW and kVA (phase and total), PF, Utility Voltage and Freq.
- Engine Protection: Low lube oil pressure, High/Low coolant temperature, Battery Over/Under/Weak Volts, Fail to Crank/ Start, Sensor failure, Cranking lockout, Low fuel level.
- AC Alternator Protection: Over/Under Voltage, Over/Under Frequency, Loss of AC Sensing, Over speed, Over Current.
- Data Logging: Engine Hours, Control Hours and upto 5 recent fault codes
- Configurable glow plug control
- 12/24 Volt DC operation
- Sleep mode
- Modbus interface (RS485 RTU)
- InPower compatible (PC based service tool)
- Certifications - meets the requirement of relevant ISO, EN, Mil Std. and CE standards
  - Maintenance due alarm based on Engine Run Time and due date
- Exerciser scheduler

### Optionals

**Engine:** No cool, heat exchanger, Oil/Coolant Heater, Heavy duty air cleaner

**Alternator:** Double Bearing, Space heater, RTDs, BTDs

**Controller:** PC3.3

## Technical Data

### Generator set specification

Model	C1010D5P
Prime Power Rating kVA	1010
Output Voltage and Frequency	415 Volts, 50 Hz
Power Factor	0.8 (lag)
No. of phases	3 phase

### Engine specifications

Make	Cummins
Model	KTA38-G19
No. of cylinders	12 'Vee'
Aspiration	Turbocharged-Aftercooled
Bore and Stroke	159 mm x 159 mm
Displacement	37.8 ltrs
Output - Prime	1180 bhp (880 kWm)
Fuel consumption @ 75% load with Radiator & Fan	153.3 ltr/hr
Fuel consumption @ 100% load with Radiator & Fan	203.8 ltr/hr
Total wet weight ( engine + radiator)	6000 kg
Length x Width x Height (engine)	2265 x 1400 x 1658 mm
Compression Ratio	14.9:1
Piston Speed	7.95 m/s
Governor	Electronic
Lubricating oil sytem capacity	155 ltrs
Coolant capacity (engine + radiator)	260 ltrs
Combustion air intake @ 100% load (+/- 5%)	68.3 m <sup>3</sup> /min
Fan air flow across radiator	1431.3 m <sup>3</sup> /min
Exhaust Temperature	484 °C

### Alternator specifications

Make	Stamford
Frame size / Model No.	HC6Y
Voltage Regulation	+ 0.5%
Insulation	Class H
Standard Enclosure	IP 23
Winding Pitch	2 / 3 Pitch
Stator Winding	Double layer lap
Rotor	Dynamically balanced
Total Harmonic Factor	<2% (50Hz)

### Rating definitions -

#### Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046.

- Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to


IS:1460

- Fuel consumption tolerance is +5%

**Typical Open Genset Dimensions**

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Wet Weight <sup>##</sup> (kg)	Standard Fuel Tank Capacity - External
C 1010D5P	1010kVA	4821	2249	2615	9178	990

## Approximate Weight

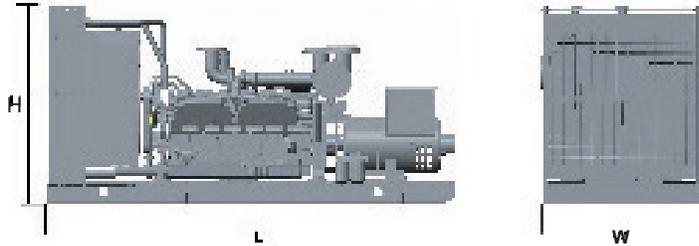

Authorised Representative

**Cummins Power Systems Offices**

- Bengaluru: Tel.: (080) 2325 9161 / 63, 2325 9165 / 67  
Fax: (080) 2325 9164
- Chandigarh: Tel.: (0172) 224 0371-73  
Fax: (0172) 224 0372
- Chennai: Tel.: (044) 2446 8110 / 2446 8113  
Fax: (044) 2491 1120
- Gurgaon: Tel.: (0124) 391 0900-01  
Fax : (0124) 391 0916
- Hyderabad: Tel.: (040) 2340 9970 / 2340 9980  
Fax. (040) 2340 9990
- Jaipur: Tel.: (0141) 236 4944  
Fax: (0141) 403 8794
- Kolkata: Tel.: (033) 2287 8065 / 2287 2481  
Fax: (033) 2290 3839
- Lucknow: Tel.: (0522) 230 5049 / 230 5059  
Fax: (0522) 230 5035
- Mohali: Tel.: (0172) 224 0371 / 72 / 73  
Fax: (0172) 224 0371 / 72 / 73
- Vadodara: Tel.: (0265) 233 0627 / 3053627  
Fax: (0265) 234 0623



Visit our facebook page at :  
Cummins Power Generation India



**“Our energy working for you.”**

Cummins is registered trademarks of Cummins Inc.  
Specifications are subject to change without notice.  
PSBU/019/KTA 38/1010kVA/HD/MP/Revision 1 - (02-2025)



**Cummins India Limited Power Systems Business** Cummins India  
Office Campus Tower-A, 8<sup>th</sup> Floor, S.  
No. 21, Balewadi, Pune – 411 045  
(India)

Email: [cpgindia@cummins.com](mailto:cpgindia@cummins.com)  
[www.cummins.com](http://www.cummins.com)