EVERY SOLUTION. X15 CUSTOMPAK


SPECIFICATIONS

nin

Туре	Four-stroke Cycle, Turbocharged, Charge Air Cooled, Inline 6 Cylinder Diesel Engine				
	US STD	METRIC			
Power Rating	600 BHP	447 kW			
Rated Speed	2100 RPM	2100 RPM			
Peak Torque	2050 lb ft	2779 Nm			
Peak Torque RPM	1400 RPM	1400 RPM			
Bore & Stroke	5.39 in x 6.65 in	137 mm x 169 mm			
Piston Displacement	912 cu in	14.9 L			
Oil System Capacity	12 US Gal	45.4 Ltr			
CustomPAK Coolant Capacity	23.8 US Gal	90 Ltr			
Engine Weight (Wet)	3166 lb	1436 kg			
CustomPAK Weight (Wet)	5070 lb	2300 kg			



SCHEMATICS

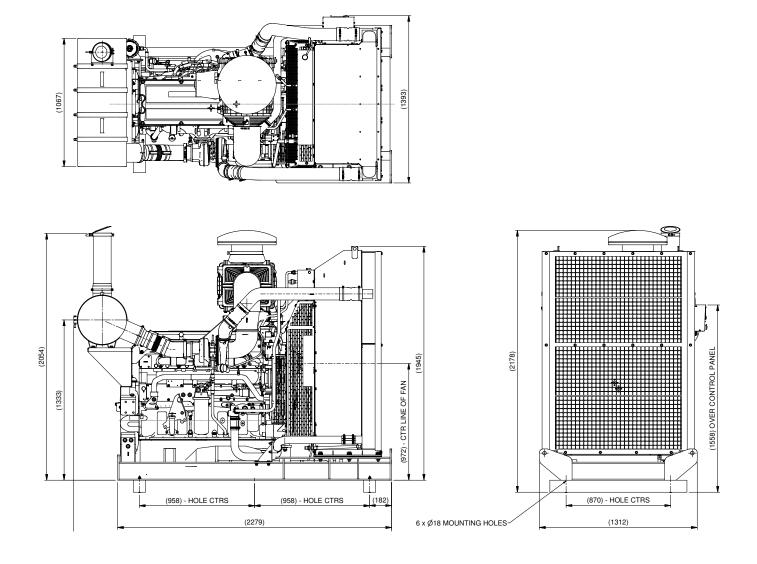

PERFORMANCE

		ver output Torque output rmittent intermittent		Power output continuous		Torque output continuous		
RPM	hp	kW	lb-ft	N-m	hp	kW	lb-ft	N-m
800	190	142	1250	1695	*	*	*	*
900	240	179	1400	1898	*	*	*	*
1100	335	250	1600	2169	*	*	*	*
1300	464	346	1875	2542	*	*	*	*
1400	546	407	2050	2779	466	348	1750	2373
1500	565	421	1977	2680	491	366	1718	2329
1700	593	442	1831	2482	524	391	1620	2197
1800	603	450	1759	2385	525	391	1532	2077
1900	610	455	1686	2286	*	*	*	*
2100	600	447	1501	2035	*	*	*	*

* Note; no continuous rating available at these speeds.

X15 - CUSTOMPAK

KEY FEATURES

- Off Highway Emissions -X15 Engine meets Euro Stage II and US EPA Tier 2 emission regulations for Off Highway applications.
- Full authority electronic controls -Electronic control system utilises the latest microprocessor technology for superior performance, fuel economy and diagnostics.
- Cummins High Pressure Injection (XPI) fuel system -Delivers cleaner quieter operation.
- Air cleaner -Heavy duty industrial air cleaner, with safety element. Optional Pre Cleaner.
- Baserail mounting -Heavy section base frame.

Cooling system -

Heavy duty, 50deg ambient capable radiator assembly, incorporating engine jacket water and charge air cooling. Blower fan configuration as standard.

Exhaust -

Integral residential class exhaust silencer with rain cap.



CARE.CUMMINS.COM

Access our extensive knowledge database, download data sheets, perform an advanced search of our website and use the contact form to email us.



EMAIL

1300cummins@cummins.com Email allows users to connect with agents online in a multitude of languages.

WARRANTY COVERAGE

Cummins base Engine coverage is 2 years or 2,000 hours of operation, or 1 year/unlimited hours of operation, whichever comes first.

All components of the X15 CustomPak which were purchased from Cummins South Pacific as a packaged product have the same Base Engine Warranty coverage as the Engine.

Extended Engine Major Components coverage is 3 years or 10,000 hours of operation, whichever occurs first.

Conditions apply. Full warranty details can be found in the Industrial Cummins Warranty brochure (Bulletin 3381322).

THE CUMMINS CARE EXPERIENCE

- At your service. 24 hours a day, 365 days a year.
- Unmatched factory-owned service support network with 35 Cummins branches and more than 150 authorised dealers across the South Pacific region.
- At the heart of our service operation is the Cummins Support Centre which boasts a team of highly experienced service technicians who will keep you Always On.

BREAKDOWN AND DIAGNOSTIC SUPPORT

PRODUCT AND SERVICE TECHNICAL SUPPORT

PARTS ORDERING DIGITAL PRODUCTS & SERVICES



CONNECTED PRODUCT SUPPORT



For Australia **1300Cummins** Ph 1300 286 646

For New Zealand 0800Cummins Ph 0800 286 646

To speak directly with the Cummins Care team for breakdown support, parts orders, product inquiries, diagnostic and one-on-one technical support, 24 hours a day 365 days a year.





Cummins Head Office 2 Caribbean Drive Scoresby VIC 3179 Australia

cummins.com

CPR1077 Produced in Australia. 7/22 ©2022 Cummins South Pacific Pty Ltd.

For more information scan here